

▪ 3072 x 2048

▪ 18 fps

Go-X Series 

GIG
VISION

➤ **GOX-6409-PGE**
6.3-megapixel CMOS rolling shutter



- *1/1.8" CMOS imager (rolling shutter with global reset)*
- *Up to 18 fps at full resolution (3072 x 2048)*
- *2.4 μm square pixels*
- *Back-side illuminated (BSI) sensor technology for enhanced low-light performance*
- *8-bit output in choice of monochrome or raw Bayer color models*
- *ROI settings for added flexibility*
- *Horizontal/vertical image flip function, plus blemish correction and shading compensation*
- *Includes Automatic Level Control (ALC) to maintain exposure in dynamic lighting conditions*
- *Compact size with excellent shock and vibration resistance*
- *Accepts power over GigE Vision interface or separate 6-pin connector*
- *C-mount lens mount*

Specifications for GOX-6409-PGE

Go-X Series

Specifications		GOX-6409-PGE
Sensor	1/1.8" CMOS rolling shutter (IMX178)	
Active pixels	3072 (h) x 2048 (v)	
Frame rate	18 frames/sec. @ 8-bit mono/Bayer	
Active area	7.37 mm (h) x 4.91 mm (v) - 8.86 mm diagonal	
Pixel size	2.4 μm x 2.4 μm	
System clock	74.25 MHz (for pulse generator)	
Read-out modes	Full ROI (single) 3072 (h) x 2048 (v) up to 18 fps H: 96 - 3072 pixels in 16-pixel steps V: 8 to 2048 lines in 2-line steps Binning 1x2, 2x1, 2x2 (mono only)	
EMVA 1288 Parameters	8-bit output format	
Absolute sensitivity	Mono: TBD p Color: TBD p (λ = 527 nm)	
Maximum SNR	Mono: TBD dB Color: TBD dB	
Traditional SNR*	>60 dB mono, >60 dB color (0 dB gain, 10-bit)	
Video signal output	Monochrome: 8-bits Color: 8-bit Bayer	
Gain control	Manual/auto 0 dB to +42 dB	
White balance	Off, presets, or one-push/continuous AWB	
Gamma/LUT	0.45 to 1.0 (9 steps) or 257-point programmable LUT	
Synchronization	Internal	
Video modes	Normal/Single ROI	
Trigger input	Opto In, Pulse Generator, Software, NAND Out (2), User Output (4)	
Exposure modes	Timed/EPS, Auto	
Electronic shutter	Timed: 16 μs to 8 s in 1 μs steps Auto: 100 μs to 55.5 ms at full resolution	
Auto Level Control (ALC)	Shutter range from 100 μs to 55.5 ms, gain range from 0 dB to +42 dB. Tracking speeds and max. values adjustable.	
Shading correction	Flat shading, color shading (color model)	
Pre-processing functions	H & V flip (mirroring), blemish compensation, H & V decimation	
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)	
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non condensing)	
Vibration	10G (20 Hz to 200 Hz, XYZ directions)	
Shock	80G	
Regulations	CE(EN 55032:2015(CISPR32:2015), EN 55035:2017(CISPR35:2016)), FCC Part 15 Class A, RoHS/WEEE, KC	
Power	6-pin PoE	+10V to +25V DC. 2.7 W typical @ +12 V +36V to +57 V DC. 3.7 W typical @ +48 V
Lens mount	C-mount	
Dimensions (H x W x L)	29 mm x 29 mm x 51.5 mm	
Weight	65 g	

Ordering Information

GOX-6409M-PGE	Monochrome camera with GigE Vision interface
GOX-6409C-PGE	Color camera with GigE Vision interface

*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.


Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 8880

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300

Visit our website on www.jai.com

Dimensions

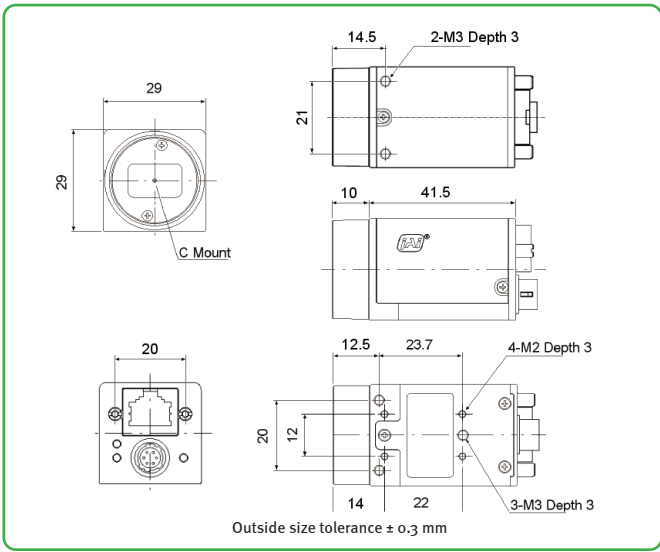

Connector pin-out

DC In / Trigger

HIROSE HR10A-7R-6PB(73)


Pin	Signal
1	DC in +10V to +25V
2	Opto In+
3	Opto In-
4	Opto Out+
5	Opto Out-
6	Ground

GigE Vision Interface

RJ-45 with locking screws

Pin	Signal
1	TRD+ (0)
2	TRD- (0)
3	TRD+ (1)
4	TRD+ (2)
5	TRD- (2)
6	TRD- (1)
7	TRD+ (3)
8	TRD- (3)

Spectral response

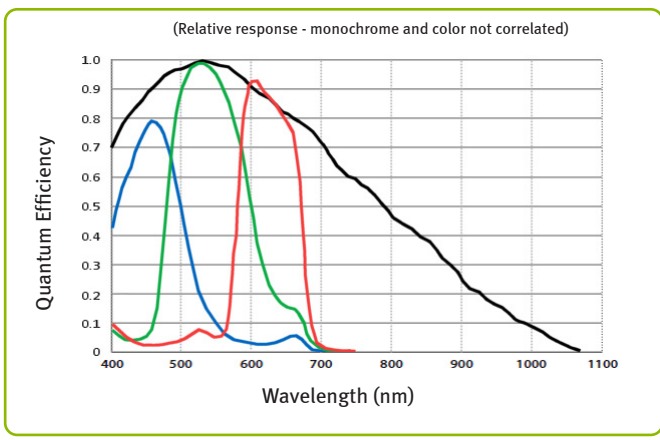

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI A-S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice.



See the possibilities