



TEC-TAURUS

Large Area Scan Camera

TTS61M2CL-13M/C


Features

- ◎ Rolling Shutter CMOS
- ◎ 9568 * 6380 pixels, 3.76 μ m * 3.76 μ m
- ◎ Frame rate up to 13.06fps
- ◎ 8/10/12 bit output
- ◎ High sensitivity and low noise
- ◎ Strobe Output
- ◎ Gain / Offset Control
- ◎ LUT
- ◎ Dark Image Correction
- ◎ Electronic refrigeration——20°C below environment temperature



Applications

- ◎ High precision machinery measurements
- ◎ Flat panel display inspection
- ◎ Semiconductor inspection
- ◎ Electronic inspection
- ◎ Astronomical observation
- ◎ Scientific experiment

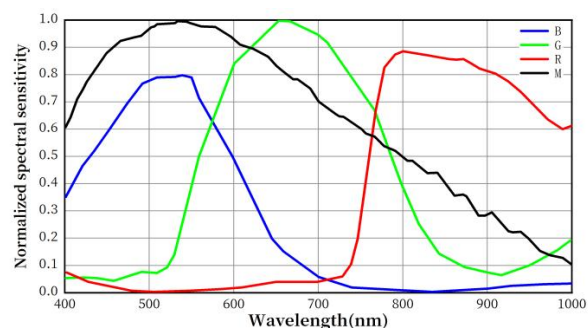

Spectral response

Specifications

Model	TTS61M2CL-13M/C
Sensor	IMX455
Image Mode	Color / Mono
Optical Size	43.24 mm
Resolution	9568 * 6380
Pixel Size	3.76μm * 3.76μm
Max Frame Rate	13.06 fps
Bit Depth	8/10/12 bit
Dynamic Range	≥75.8 dB
Data Rate	830 MB/s
Trigger Mode	Free run / External trigger
Trigger Source	Camera Link CC / External IO
Exposure Control	Program / Pulse Width
Exposure Time	120μs-60s(Step:4tap/60μs;8tap/30μs;10tap/23.75μs)
Analog Gain	0-96
Digital Gain	0.01-8.00x
Lens Interface	F Mount
Data Interface	Camera Link
Power Interface	Hirose HR10A-7R-6PB(Male)
Power Supply	DC12V±10% 5A
Power Consumption	50.0 W
Cooling Mode	Electronic refrigeration(20°C below environment temperature) / Fan refrigeration
Dimensions	111.0mm(W) x 111.0mm(H) x 103.0mm(D)(Without ferrule)
Operating Temperature	0-50°C
Storage Temperature	-20-75°C

Mechanical Dimensions(mm)

